



PREDATOR MOBILE BATCH DRYING

The Predator series grain dryer is a fully mobile batch dryer able to be moved from field to field or property to property. Whenever and you need it.

With medium temperatures and high airflow, a gentle drying process is ensured across all products. Coupled with no continuous auguring and minimum grain movement, product quality will not be compromised.

Unlike other dryers if there is less than a full load of grain, you can still dry using only one section.



**Get Harvesting
Earlier**

**Better Quality and
Quantity**

**Shorter Harvest
Period**

**More Harvest Hours
Per Day**

Reduced Losses


Better Prices



AGRIDRY

CONTROL YOUR HARVEST

SPECIFICATIONS:



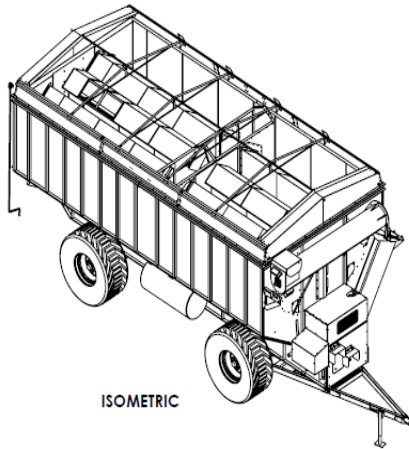


Model		APRED
Objective Material		Please refer to our Commodities List
Holding Capacity / batch (m ³)		25m ³
Performance	Loading (tonne/Hr)	Loading Dependant on Speed of in load Auger/Elevator
	Unloading (tonne/Hr)	80
	Drying Rate (%/Hr) *	2%
Heated Air Source	Drying Method	Batch
	Equipment	Diesel Burner
	Fuel	Diesel
Power Supply	Temperature Control	Automatic
	Voltage	1Phase 240V
Power Consumption	Alternator	7.5kVA
	Main Fan	PTO Driven
	Cooling Fan	
	Discharge Screw	
	Empty Screw	
	Levelling Screw	NA
	Metering	NA
Cross Screw	NA	
Safety Devices	Infeed Screw	NA
	Air Over Temperature Relay	
	Plenum Air Temperature Sensor	
	Airflow Detection Sensor	
Standard Equipment		RCD Protection
Optional Equipment		Low/High Heat Selection
		Outside Air and Humidity Sensor

*The drying rate may vary from the rate above depending on material condition. (moisture, contamination, variety), Outside circumstances (temperature, humidity), and operating conditions (operational setup, assisting equipment)

Drying rate is calculated at Ambient Conditions of 20°C @70% Relative Humidity and Drying Air Temp 65°C

DIMENSIONS:

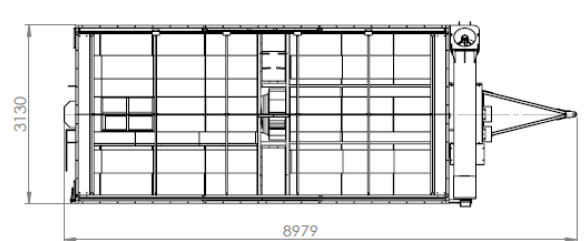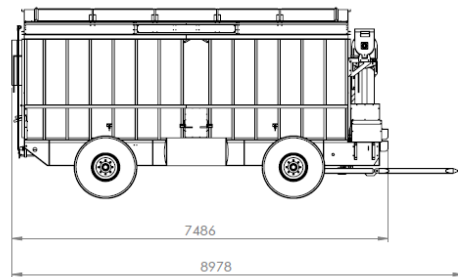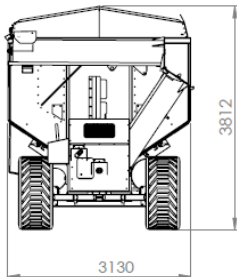

Model	Width (mm)	Length (mm)	Height (mm)
APRED	3130	8978	3812